


NOTES:

- CONTACT HYDRACON FOR THE MOST CURRENT DRAWINGS, DIMENSIONS AND INFORMATION. ALL INFORMATION DEEMED ACCURATE AND RELIABLE BUT SUBJECT TO CHANGE. ALL RIGHTS RESERVED.

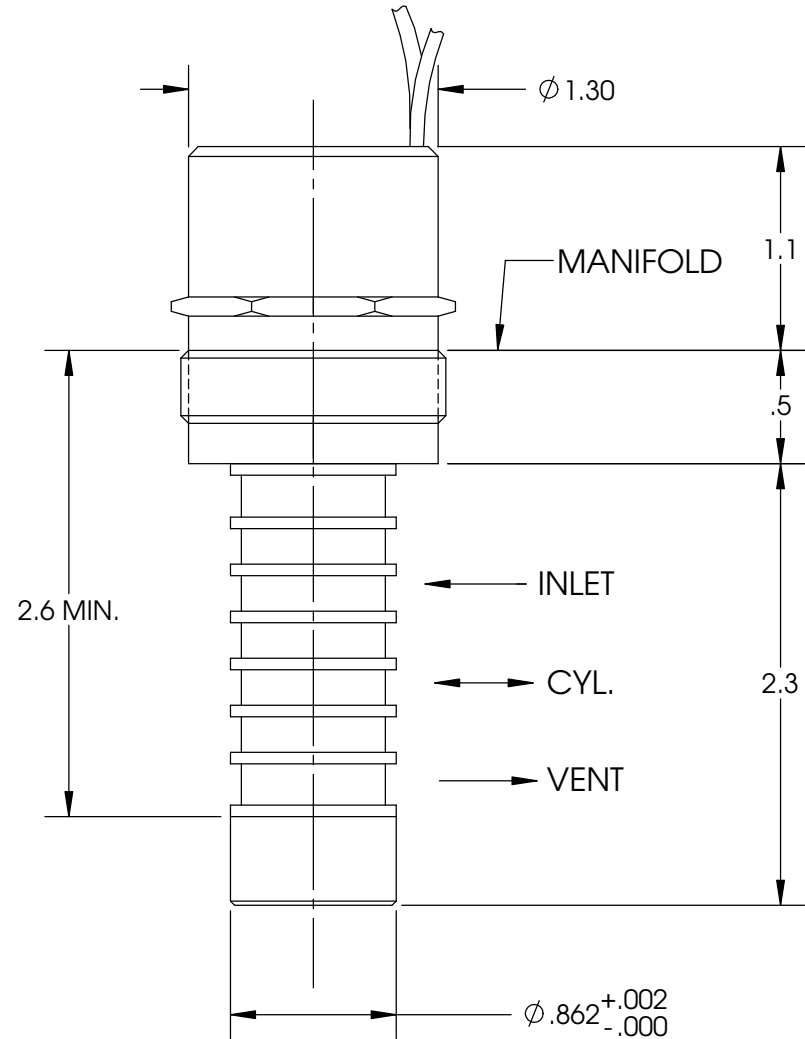

SPECIFICATION, 1721-100

- TYPE: SOLENOID VALVE, CAVITY INSERTION, 3-WAY, 2-POS., NORMALLY CLOSED
- PRESSURE CHARACTERISTICS: OPERATION 5000 PSID
PROOF 7500 PSID
- FLOW: ESEOD 0.05"
- ELECTRICAL: VOLTAGE: 18-32 VDC
3.0 AMPS @ 24 VDC
PULSE TIME - 100 MILLISECONDS
- LEADWIRES-
- LEAKAGE: BUBBLE TIGHT
- WEIGHT: 2.5 LBS. (CALC.)
- MATERIALS OF CONSTRUCTION:
ALL METALS ARE STAINLESS STEALS

HYDRACON COMPANY, INC.

PO BOX 27584
Anaheim, CA USA

SCALE: NONE	APPROVED BY:	DRAWN BY:
DATE: 3-1-2011		REVISED:
SOLENOID VALVE - 3 WAY - 2 POS. CAVITY INSERTION		
NEXT ASSY:	SHEET 1 OF 1	REV.
	DRAWING IN 2D	DRAWING NUMBER: 1721-100